

## Pragmalux Sensus PIR sensor L universeel hoog-/laagmontage opbouw Casambi





**Important:** Read All Instructions Prior to Installation

### Function introduction

Cable Wiring:  
 L (Input) : Black, 18 AWG ; N (Input) : White, 18 AWG  
 L'(Output) : Red, 18 AWG

DALI+ (Output) : Yellow, 22 AWG DALI- (Output) : Blue, 22 AWG

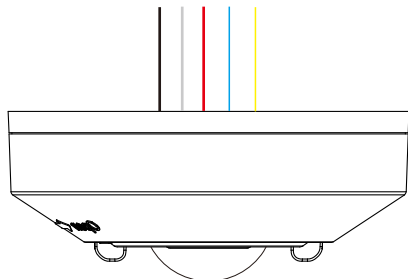

### Product Description

The ceiling mounted sensor combines presence sensing, daylight harvesting, DALI dimming and Casambi radio technology. The sensor can work with DALI LED drivers or luminaires, the luminaires just need to be connected to mains power. The result is increased occupant comfort and significant energy savings that meet the most demanding building energy codes. The sensor is suitable for low bay applications which need sensor based automation.

### Casambi Technology Explained

The Casambi technology provides a mesh network where all the intelligence of the system is replicated in every node and, in such a way, creates a system with no single point of failure. In this kind of fully distributed architecture, any unit can go offline and catch up from others when they return back online.

### Wireless Features

- Control a large number of fixtures from any point
- Simple to use UI
- Wide range of functionality – Grouping Luminaires, different lighting situations for different occasions, colour temperature, daylight sensor, occupancy sensor and much more.

### Product Data

#### Input & Output Characteristics

Operating voltage	100-277VAC 50/60Hz
Standby power	<0.5W
Relay	Resistive: Max. 10A @ 120-277VAC , Capacitive: Max. 8A @ 120-277VAC, Inductive: Max. 7A @ 120-277VAC

### Mechanical Data

Dimension	See dimension
Material	Flame-retarant/ABS
Protection Class	Class II

### Safety & EMC

EMC standard(EMC)	EN55015, EN61000, EN61547
Safety standard(LVD)	EN60669-1, EN60669-2-1, AS/NZS60669-1/-2-1
RED	En300328, EN301489-1/-17
Certification	ENEC, CE, RED, UL

### Wireless Communication

Transceiver Frequency	2.4GHz ISM band
Radio Range	164 feet (50m) in open field
Radio Certification	FCC/IC, CE

### Lighting Control

Features	DALI broadcast, Scene control Autonomous sensor-based control, Scheduler control
----------	---

### Sensing

Movement detection	Max. 10-12m @3m height (LB lens); max. 26m @12m height (HB lens)
Installation	2-6m, max. 6m (LB lens); max. 12m (HB lens)

### Connectors

Terminal block/Wire size	AC Line: 18AWG, Signal Line: 22AWG
Wire strip length	10mm

### Environment

Operating Temperature Range	Ta: -10°C to +50°C
IP rating	IP20

### Key Features

- PIR motion detection
- Daylight harvesting
- Works with DALI drivers or luminaires, broadcast control
- Autonomous sensor-based control
- Can be use for indoor applications

### Benefits

- Cost-effective solution for energy savings
- Energy code compliance
- Robust mesh network

### Warnings



- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

### Applications

- Open offices
- Individual offices
- Conference rooms
- Classrooms
- Retail stores
- Hospitals
- Lobbies


## Detection Pattern

### With low-bay lens - Cone angle (127°)

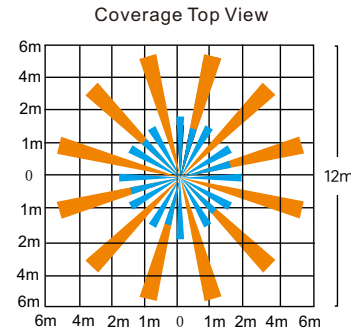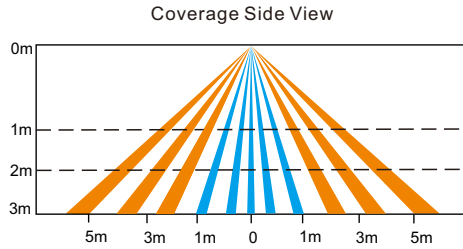


The detection area for movement sensor can be roughly divided into two parts:

- █ Slow movement (person moving < 1.0/s or 0.3m/s)
- █ Quick movement (person moving > 1.3/s or 0.4m/s)





With Corridor Lens Mask:  
φ4-5m at 3m height




With Semi-Circular Mask:  
Half-detection pattern

### With high-bay lens - Cone angle (98°)

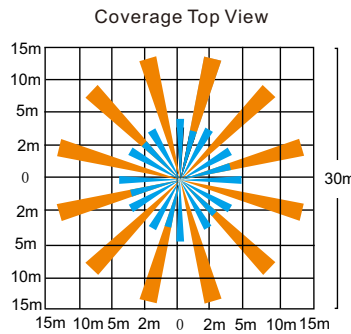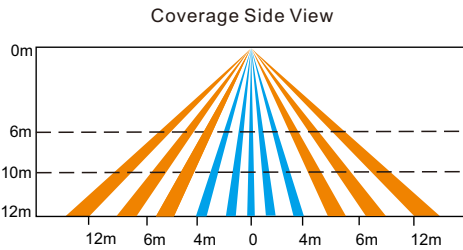


The detection area for movement sensor can be roughly divided into two parts:

- █ Slow movement (person moving < 1.0/s or 0.3m/s)
- █ Quick movement (person moving > 1.3/s or 0.4m/s)



With Corridor Lens Mask:  
φ6-9m at 12m height




With Semi-Circular Mask:  
Half-detection pattern


## Detection Area

Note:

- 1) Following different detection areas are based on different installation heights & patterns.
- 2) Detection Pattern is a relevant value, the performance should depend on the site conditions (installation height/ temperature/ sunlight/ humidity/ blind area...etc)




Low-bay lens detection pattern at 3m




High-bay lens detection pattern at 12m

\* This product comes with a pre-mounted low-bay lens (default) and an extra free high-bay lens. Install the lens that best fits your detection needs.


## Application



1. Power up the sensor. The load should come on immediately.




2. Vacate the room or remain very still and wait for the load to switch off.




3. Enter the room or make some movement and check that the load switches on.

### PRECAUTIONS

- Do not place the SENSOR near heat sources, fans or in ventilated ceiling voids.
- Do not place close to, or positioned such that, any light source points directly into the SENSOR.
- Ensure wires and cables are securely held within the connection terminals.
- Disconnect the SENSOR from the circuit before performing insulation testing of the wiring circuit.




Aisle/Corridor application:  
Split the lens cover into aisle type.




Semi-sphere application:  
Split the lens cover into Semi-circle type.


## Place/Detection instruction

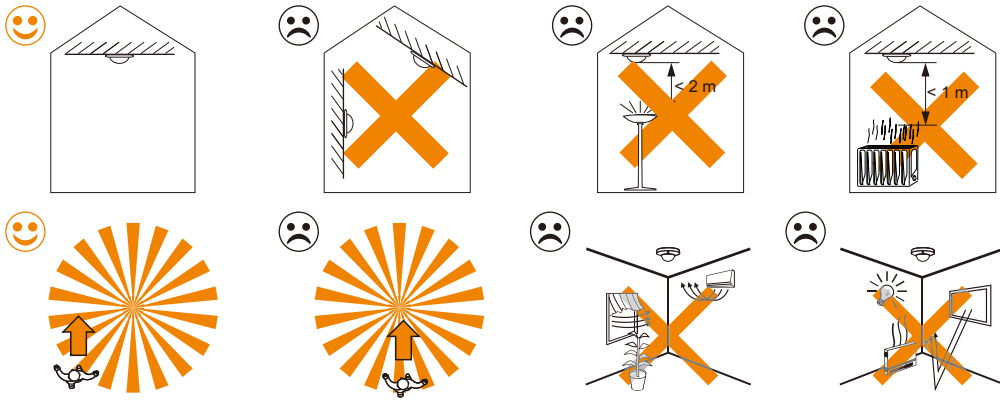

## Product Dimension

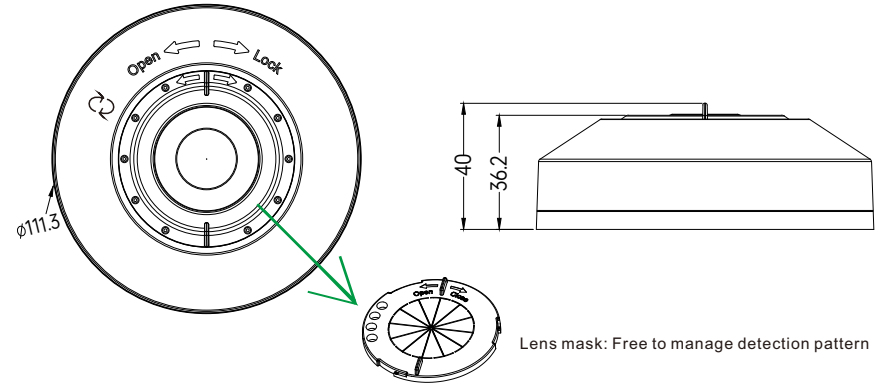

## Wiring Diagram

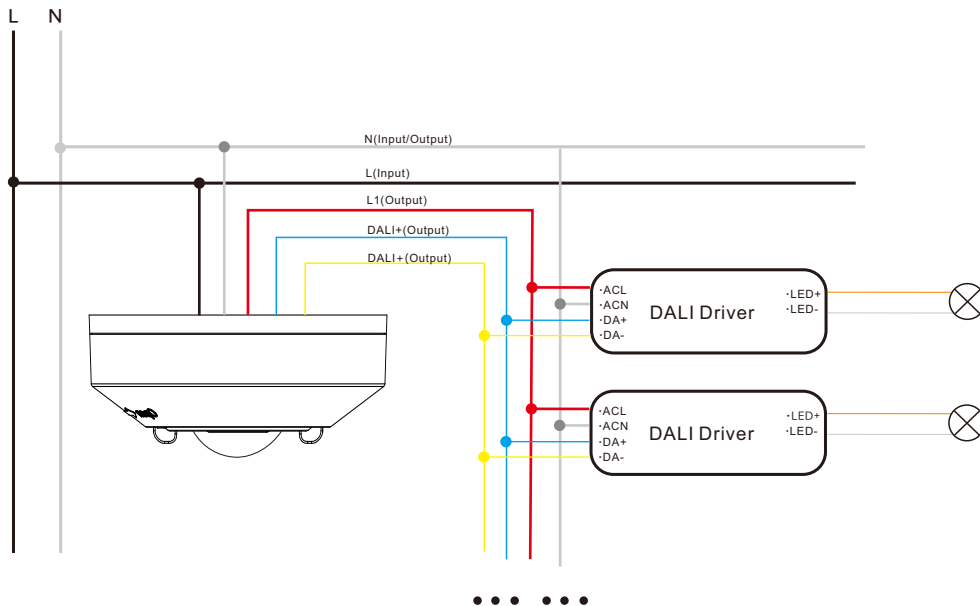

Note: Built-in 80mA DALI BUS output enables to have Min.40pcs DALI Control gears.

## Installation Precautions

- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.